


approved : UL Subj. 758
UL Subj. 1581

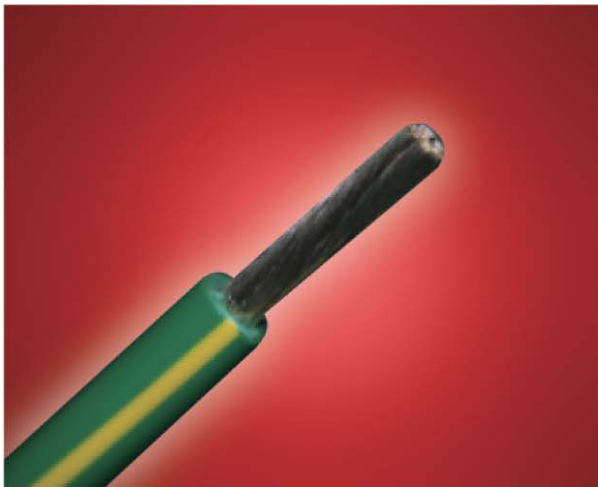


◆ **Characteristics**

Rating 105°C 600V
Flammability VW-1 , FT1
Flexible and electrical character is excellent.

◆ **Application**

Internal wiring of appliances; or internal wiring of appliances where exposed to oil at a temperature not exceeding 60°C or 80°C (whichever is applicable).
Tags may indicate the following : 2500 Volts Peak – For Electronic Use Only.

◆ **Construction and Specifications**

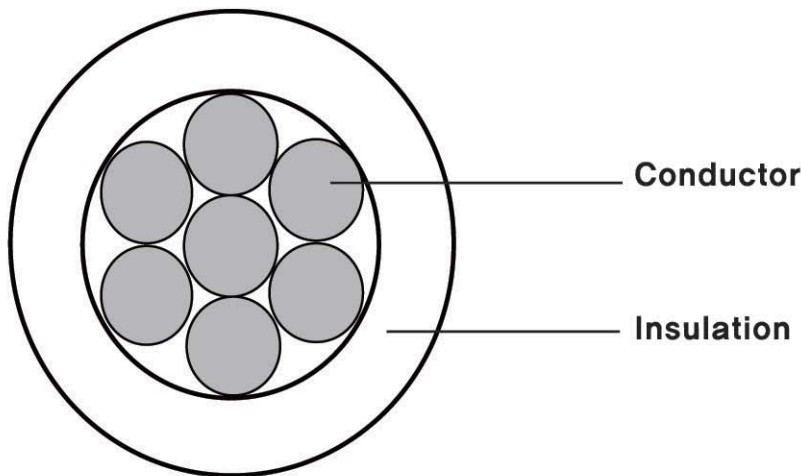

◆ **Surface Marking**

c AWM I A/B 105°C 600V FT1 E203693 AWM 1283 105°C 600V
VW-1 XX AWG DUSUNG CABLE –RoHS LF–

Style	Conductor			Insulation		Conductor maximum resistance (Ω /km)	Insulation minimum resistance (MΩ/km)	Dielectric withstanding voltage V/min	Allowable current Reference (A)	Unit length m
	AWG Size	No. of Cores	Construction (mm)	Material	Thick. (mm)					
1283	8	1	7/24/0,254	Heat Resistant PVC	1,60	2,370	15	3000	67,90	200
	6		7/38/0,254			1,490			90,80	
	4		7/60/0,254			0,947		4000	121,00	
	2		19/35/0,254			0,600			166,00	
1284	1	1	19/44/0,254	Heat Resistant PVC	2,15	0,475	15	5000	193,00	200
	1/0		19/55/0,254			0,380			221,00	
	2/0		19/70/0,254			0,299			275,00	

※ RoHS is Applied to all Products.

