


approved : UL Subj. 758
UL Subj. 1581

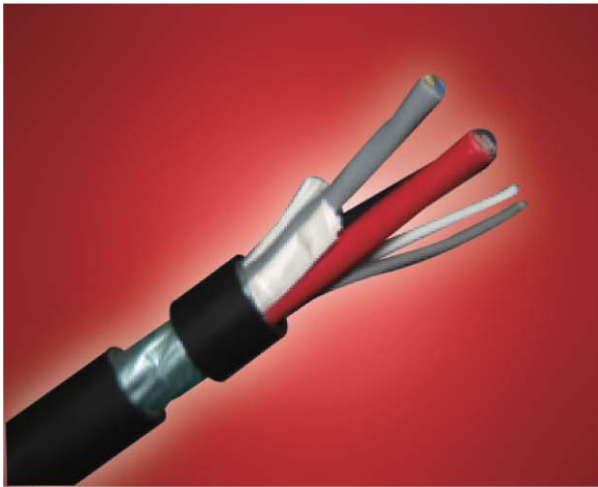


◆ **Characteristics**

Rating 105°C 300V
Flammability VW-1
Flexible and electrical character is excellent.

◆ **Application**

External interconnection of electronic equipment or internal wiring of electronic equipment or appliances. Tags may also indicate the following: "600 Volts peak for Electronic Use Only".

◆ **Construction and Specifications**

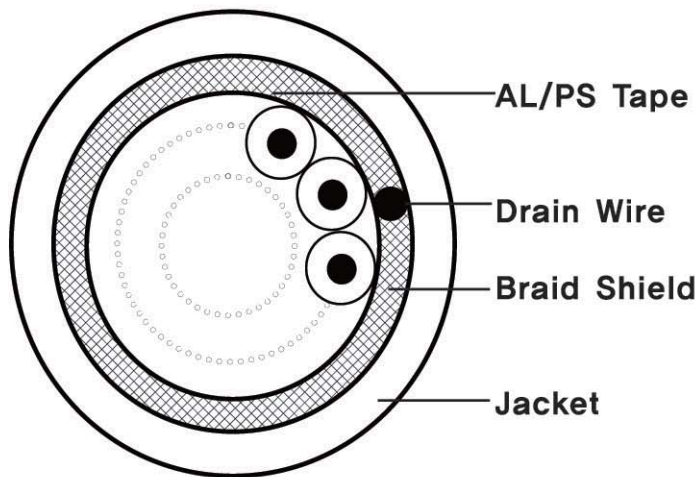

◆ **Surface Marking**

E203693 AWM 2517 VW-1 105°C 300V XX AWG DUSUNG CABLE – LF –

Style	Conductor			Insulation		Shield			Jacket	
	AWG Size	No. of Cores	Construction (mm)	Material	Thick. (mm)	Material of Tape	Coverage (%)	Drain wire material	Material	Thick. (mm)
1569	22	2-20	17/0,160	Heat Resistant PVC	0.42	AL/PS Tape	70% (Min)	Tin-coated copper stranded wire	Extruded PVC	1.00
	20		21/0,180							
	18		34/0,180							
	16		26/0,254							
	14		41/0,254							
	12		65/0,254							
	10		66/0,320							

※ RoHS is Applied to all Products.

