


approved : UL Subj. 758  
UL Subj. 1581

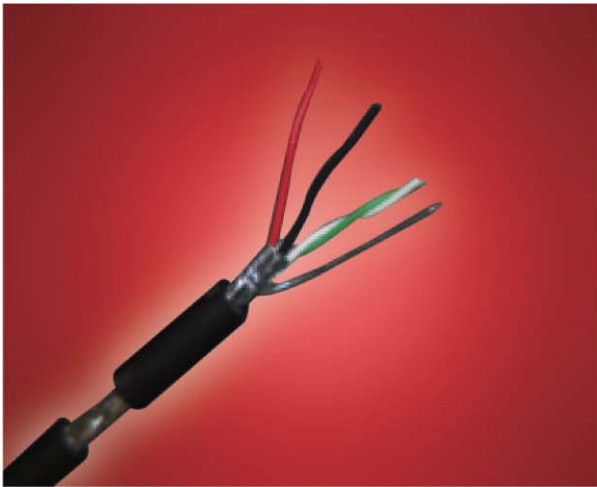


◆ **Characteristics**

Rating 60°C or 80°C 30V  
Flammability VW-1  
Flexible and electrical character is excellent.

◆ **Application**

Internal Wiring of electronic equipment in Class 2 Systems only.

◆ **Construction and Specifications**

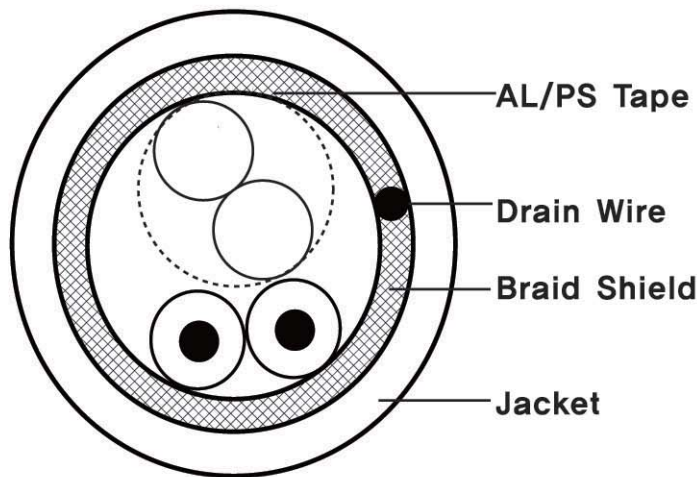

◆ **Surface Marking**

E203693 AWM 2725 VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE DUSUNG -LF-

Style	Conductor			Insulation		Shield			Jacket	
	AWG Size	No. of Cores	Construction (mm)	Material	Thick. (mm)	Material of Tape	Coverage (%)	Drain wire material	Material	Thick. (mm)
28	28	4C	7/0,127	PE	0,25	AL/PS Tape	70% (Min)	Tin-coated copper stranded wire	Extruded PVC	1,00
	28		7/0,127	PVC						
26	28	4C	7/0,127	PE						
	26		7/0,160	PVC						
24	28	4C	7/0,127	PE						
	24		11/0,160	PVC						

※ RoHS is Applied to all Products.

