


approved : UL Subj. 758
UL Subj. 1581

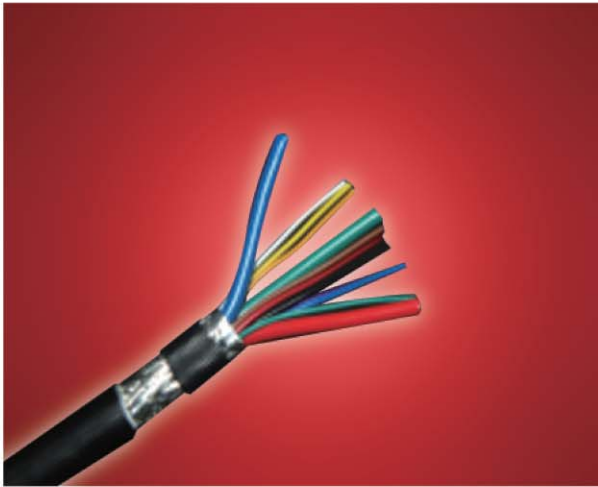


◆ **Characteristics**

Rating 80°C 30V
Flammability VW-1
Flexible and electrical character is excellent.

◆ **Application**

Internal Wiring or External interconnection of electronic equipment, class 2 circuits only.

◆ **Construction and Specifications**

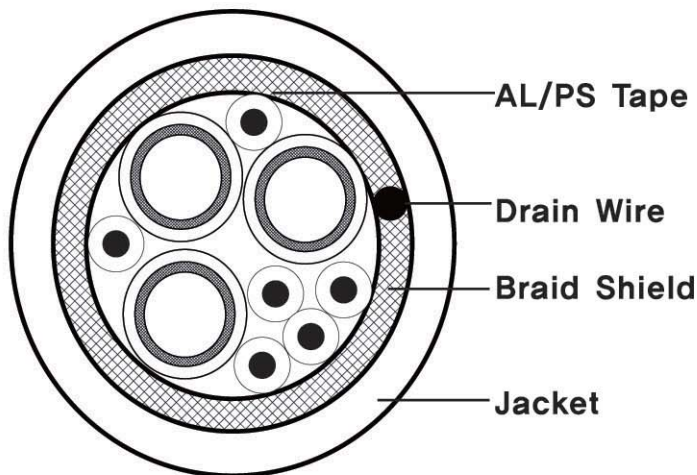

◆ **Surface Marking**

E203693 AWM 2990 VW-1 80°C 30V LOW VOLTAGE COMPUTER CABLE
DUSUNG – LF –

Style No. Cores	Conductor		Insulation			Shield		Jacket		Impe- dance
	AWG	No. of Cores	Material	Diamater	Color	Material of Tape	Coverage (%)	Material	Thick. (mm)	
1354 X 3C + 1061 X 6C	28	7/0.127	PE Form	1.55	RD	AL/PS	80% (Min)	Extruded PVC	1.00	75 [Ω]
					GN					
BL										
	26	7/0.160	SR – PVC	0.98	Option					

※ RoHS is Applied to all Products.

